


Kool Tek Water Cooler

Users Manual

Models: *FCCW2*
FCCB2
FHCW2
FHCB2


KEEP THIS MANUAL IN GOOD CONDITION
PLEASE READ THIS CAREFULLY BEFORE
USING THIS MACHINE

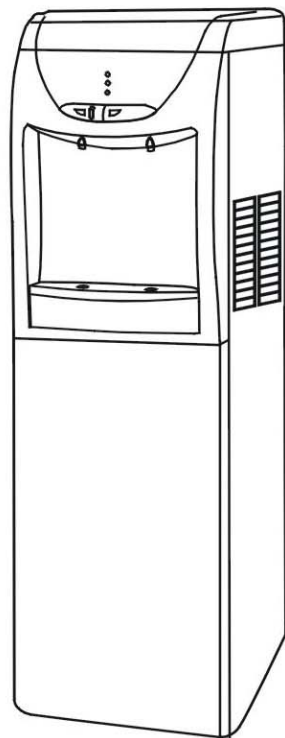


DIRECTORY

A. DIAGRAMS AND PART LISTING	1
B.SET UP	2
C.CAUTIONS	2
D.CLEANING AND SANITIZING	3
E.TROUBLE SHOOTING	4

A: DIAGRAMS AND PART LISTING

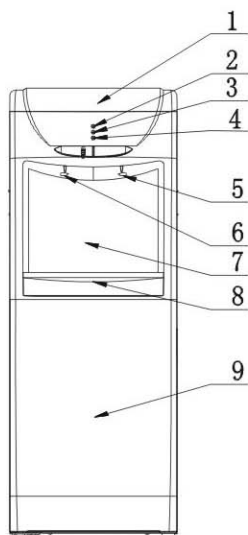


(FRONT)

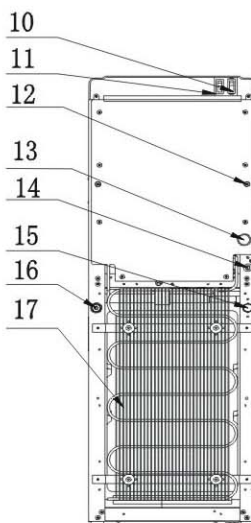

(REAR)

NO.	PART NAME	NO.	PART NAME
1	Top Cover	10	Heating Switch
2	Keeping Warm Light	11	Cooling Switch
3	Heating Pilot Lamp	12	Thermostat
4	Cooling Pilot Lamp	13	Ozone Port
5	Tap of Cold Water	14	Power Supply Cord
6	Tap of Hot Water	15	Water Drain
7	Front Shell	16	Water Inlet
8	Drip Tray	17	Condenser
9	Cabinet Door		

MODEL	CAPACITY		RATED POWER		N.W.	MEAS(Inch)
	COLD WATER	HOT WATER	COOLING	HEATING		
FCCW2/FCCCB2	2L/h($\leq 42^{\circ}\text{F}$)	————	95W	————	14.3kg	14.5 X 15.3 X 40.4
FHCW2/FHCB2	2L/h($\leq 42^{\circ}\text{F}$)	5L/h($\geq 185^{\circ}\text{F}$)	95W	420W	14.8kg	14.5 X 15.3 X 40.4

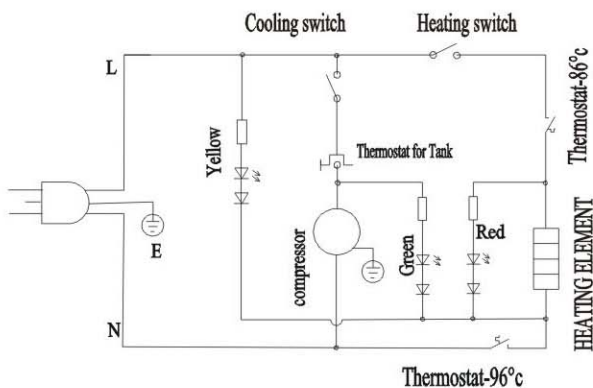

CIRCUIT DIAGRAM

B.SET UP

- 1: Place machine on dry level surface. Place back of machine 6 inches away from wall for ventilation. Do not place machine on paper or foam, which may cause store water and cause machine to move.
- 2: To avoid damage do not plug power cord or turn on switches until tanks are filled with water.
- 3: Flush filters according to manufacturers directions.
- 4: Attach water line to water inlet fitting on back of cooler. Turn on water supply and let tanks fill before plugging in machine and turning on power switches.

C.CAUTIONS

- 1: Never turn off machine by unplugging.
- 2: Never turn machine upside down or tilting more than 45degrees
- 3: Wait 3 minutes before turning machine back on after being shut off, allowing it to reset.
- 4: Thermostats have been set at factory . Do not adjust either thermostat.

D.CLEANING AND SANITIZING

To avoid accident, unplug machine before cleaning.

1: Machine has been sanitized at factory.

Draining and sanitizing:

1: Open taps and drain water. Open drain lines to completely drain machine. Cautionmachine heats water to 180 degrees use caution when draining hot tank

2: After machine is completely drained replace drain caps.

3: Flush tanks with solution of hydrogen peroxide and water. Refill with water and flush tanks.

4: Ozone sanitizing....Attach Kool Tek Ozone Sanitizer(instruction included with sanitizer) to adapter and let run for 5-7 minutes with tanks full.....Drain water and refill.

E.TROUBLE SHOOTING

Please check the followings before having the machine repaired.

PROBLEMS	POSSIBLE CAUSES	ELIMINATION
no hot or cold water	1. over consumption of hot or cold water in short time 2. no power supply	1. just wait a moment, then hot or cold water is available again. 2. connect plug to socket,turn on heating or cooling switch.
noisy operation	not placid installation	place the machine on placid & solid surface